



Model Number C5708-1, -2 Diplexer

Rev. A
02/28/13

Features:

- Cavity Design
- Low Loss

Applications:


- Wireless
- Test Equipment

Package Size:

- 0.63" x 2.0" x 4.0"
- (Please see outline for exact dimensions)

Weight:

- 6.1 oz., 0.38 lb.

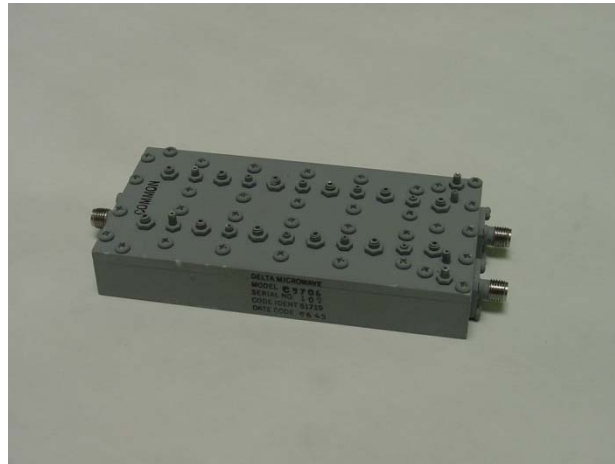

Specifications: (+25° C)	Channel 1	Channel 2
-1 Passband Center	5745 MHz	5810 MHz
-2 Passband Center	5765 MHz	5830 MHz
Insertion Loss	2.2 dB Maximum	2.2 dB Maximum
3 dB Bandwidth	40 MHz	40 MHz
VSWR	1.5:1	1.5:1
Isolation	50 dB Minimum	50 dB Minimum
Connectors	SMA Female per MIL-C-39012	
Operating Temperature	-40° to +70° C	



Registered to AS9100 (with ISO 9001)

Delta Microwave

300 Del Norte Blvd. Phone: 805.751.1100 email: sales@deltamicrowave.com
Oxnard, CA. 93030 Fax: 805.240.9544 www.deltamicrowave.com

Delta Microwave's Quality Management System has been assessed by NSF-ISR and found to be in conformance with AS9100:2009, Rev. C. Delta Microwave reserves the right to change specifications without notice. Please verify specification revision letter upon order placement.

Written By	Approved By