



Model Number C5714-2 Diplexer

Rev. D
02/28/13

Features:

- Cavity Design
- Low Loss

Applications:


- Wireless
- Test Equipment

Package Size:

- 0.63" x 2.0" x 4.0"
- (Please see outline for exact dimensions)

Weight:

- 6.1 oz., 0.38 lb.

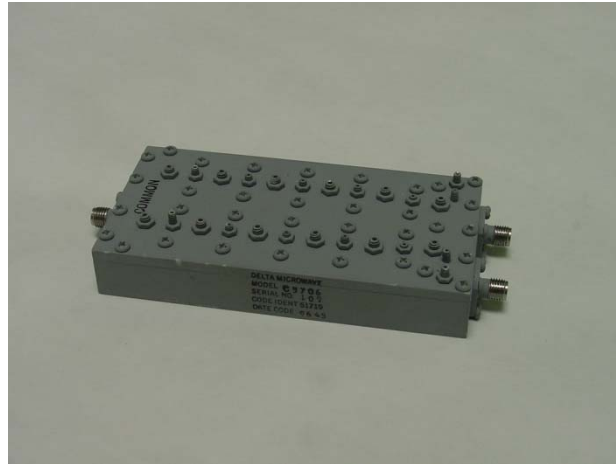

Specifications: (+25° C)

	Channel 1	Channel 2
Passband	6050 to 6175 MHz	6300 to 6425 MHz
Insertion Loss	1.0 dB Maximum	1.0 dB Maximum
VSWR	1.5:1 Maximum	1.5:1 Maximum
Isolation	60 dB Minimum	60 dB Minimum
Rejection	40 dB from 1 to 5500 MHz 40 dB from 6300 to 10000 MHz	40 dB from 1 to 5925 MHz 40 dB from 6800 to 11700 MHz
Power Handling	10 Watts	10 Watts
Connectors	SMA Female per MIL-C-39012	
Operating Temp.	-45° to +85° C	



Delta Microwave

300 Del Norte Blvd. Phone: 805.751.1100 email: sales@deltamicrowave.com
Oxnard, CA. 93030 Fax: 805.240.9544 www.deltamicrowave.com

Delta Microwave's Quality Management System has been assessed by NSF-ISR and found to be in conformance with AS9100:2009, Rev. C. Delta Microwave reserves the right to change specifications without notice. Please verify specification revision letter upon order placement.

--	--

Written By

Approved By