



Model Number Ku1620 Bandpass Filter

Rev. C
03/07/13

Features:

- Combline
- Compact
- Light Weight
- Pins or SMA Connectors

Applications:


- Data Link

Package Size:

- 0.4" x 0.6" x 1.7"
(Please see outline for exact dimensions)

Weight:

- 0.6 oz., 0.04 lb.

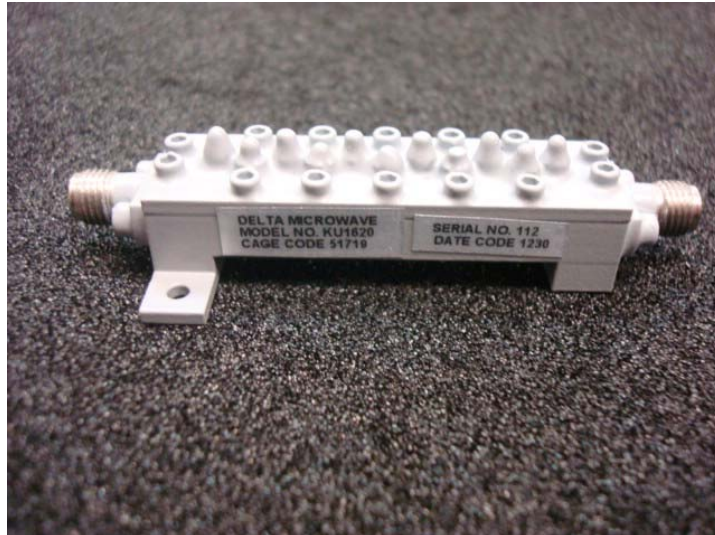

Specifications: (+25° C)

| | |
|-----------------------|---------------------------------------|
| Passband | 14400 to 14830 MHz |
| Insertion Loss | 1.5 dB Maximum |
| VSWR | 1.5:1 Maximum |
| Rejection | 40 dB Minimum from 15150 to 15350 MHz |
| Power Handling | 5 Watts Maximum |
| Connectors | 0.020" Pins or SMA Female |
| Operating Temperature | -40° to +70° C |



Delta Microwave

300 Del Norte Blvd. Phone: 805.751.1100 email: sales@deltamicrowave.com
Oxnard, CA. 93030 Fax: 805.240.9544 www.deltamicrowave.com

Delta Microwave's Quality Management System has been assessed by NSF-ISR and found to be in conformance with AS9100:2009, Rev. C. Delta Microwave reserves the right to change specifications without notice. Please verify specification revision letter upon order placement.

| | |
|------------|-------------|
| Written By | Approved By |
|------------|-------------|